

CCTV Video Wall Monitor 46VDW Display



ADVANTAGES

- Slim Bezel Width: 14.2(H) / 13.7(V) mm
- Ideal for Digital Signage Application
 - Spread Single image across multiple monitors using Single video source
 - Perfectly Integrated with VuREX DID Manager
 - Remotely Controlled via TCP/IP network
 - RS-232C In & Out for Controlling the Monitors via Server / PC
- Flexibility
 - Vertical / Horizontal Display
 - Configure up to a 10 x 10
 - Various types of Mount Kits are available (Wall, Stand, Stand alone, Ceiling, Scissor)



VuREX VDW DID Video Walls possess all the excellent DID technology, multiple image processing technology, signal switching technology.

VuREX VDW DID Video Walls are suitable for a wide range of applications: Retail stores(Restaurants, Cinemas and Theaters), Public Venues(Airports, Railway Stations, Shopping Malls), as well as Entertainment and Events (Tradeshows, Conference Centers).

SPECIFICATIONS 46VDW


Display	Bezel Width	14.2(H) / 13.7(V) mm	Features	RS-232C Control	Serial Interface Control Program PC
	Active Display Area	1018.8 x 572.67 mm		Filter Type	3D Comb Filter
	Screen Size	46"		Deinterlacing	Yes
	Panel Resolution	1920 x 1080 @60Hz		Noise Reduction	Yes
	Pixel Pitch	0.53025 x 0.53025 mm		Multi Display Function	PIP / PBP / VOV(Video On Video)
	Brightness	700cd/m ²		Trigger Source Switching	Yes
	Contrast Ratio	4,000 : 1		Auto Source Sequencing	Yes
	Viewing Angle (H/V)	178° / 178°		Auto Power Recovery	Yes
	Display Color	16.7 Million		Multi Language	English, Spanish, French, German, Italian
	Response Time (Gray to Gray)	< 8ms			
	Video System	NTSC / PAL			
Interface	Video In / Out (BNC Type)	2 / 2	Dimension	Outline Dimension (W x H x D)	1,050 x 610 x 125 mm
	S-Video In	1	Net. Weight	36Kg	
	VGA In (15Pin D-Sub)	1	Cabinet	Bezel Color / Cabinet Color	Black / Black
	Component In	1		Case Material	Metal(Electronic galvanized Iron)
	HDMI In	2	Warranty	Part/Labor	2year / 2year
	DVI In	1		MTBF (Approx.)	50,000 Hours
	Audio In (RCA Type)	3(L+R)	Regulations		NRTL, FCC, CE, RoHS
	PC Stereo In	1			
Transmitter	RS232C In / Out	1 / 1 Monitor OSD Control Using PC	Power	Consumption : < On	< 260W
	Remote Control	Yes		Power Source	AC100 ~ 240V (50 / 60Hz))
Audio	Built-In Speaker	Yes (5W x 2)	Mount	VESA™ Mount Size	600 x 400mm
				Mount Kit	Optional (Wall, Stand, Stand alone, Ceiling, Scissor)

LED Video Wall Monitor 46VDW Display

OTHER VIEW



FRONT VIEW

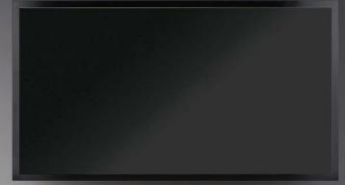


REAR VIEW



SIDE VIEW




DIMENSIONS

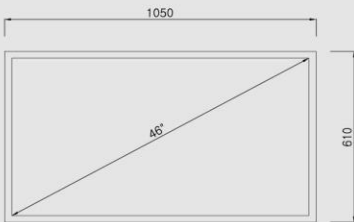

▲ FRONT VIEW



▲ SIDE VIEW



▲ REAR VIEW



▲ TOP VIEW

RN Electronics Co., Ltd

Add 414, 172, LS-ro, Gunpo-si, Gyeonggi-do, 435-824, Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

RNElectronics