

Open Frame LCD Monitor 15VIO Display



ADVANTAGES

- Easy integration into custom enclosures or kiosks
- All Metal Case
- VESA Mount Hole (100mm X 100mm)
- Input Signal : VGA, DVI
- Input Power : AC110~230V(50/60Hz)
- Touch Screen Options: Resistive, Capacitive, SAW Touch
- 2 year warranty

VuREX VIO LCD/LED Open Frame Monitors offer easy integration into custom enclosures or kiosks and are ideal as a versatile and long-term display platform for OEM's and designers. They can be used in both indoor and outdoor environments. They offer flexible options for touchscreen, signal interface and chassis mounting

SPECIFICATIONS 15VIO

Display	Screen Size	15"	Dimension	Outline Dimension (WXHxD)	370 X 300 X 50mm	
	Max. Resolution	1024X 768 @ 60Hz		Net. Weight	TBA	
	Panel Type	LCD	Cabinet	Cabinet Color		
	Pixel Pitch	0.297 mm X 0.297 mm		Case Material	Metal(Electronic galvanized Iron)	
	Luminance, White	250 cd/m ²	Warranty	Part/ Labor	2year / 2year	
	Contrast Ratio	450 :1	MTBF(Approx.)		50,000 Hours	
	Viewing Angle(H/V)	130°/ 100°	Regulations			NRTL, FCC, CE, RoHS
	Support Color	16.7 Million	Power	Consumption : < On	< 35W	
	Response Time	< 5ms		Electrical Ratings	AC110 ~ 230V(50/60Hz) DC 12V / 3.5A	
Interface	VGA In (15Pin D-Sub)	1	Circumstance	Operating Temperature	-30℃ to 70℃	
	DVI-D In	1		Storage Temperature	-20℃ to 80℃	
Audio	Built-In Speaker	N/A	Mount	VESA Size (HXV)	100mm X 100mm	
			Option	Touch Sensor	Resistive, Capacitive, SAW Touch	

Design and specifications are subject to change without notice


Open Frame LCD Monitor 15ViO Display

OTHER VIEW


SIDE VIEW



DIMENSIONS

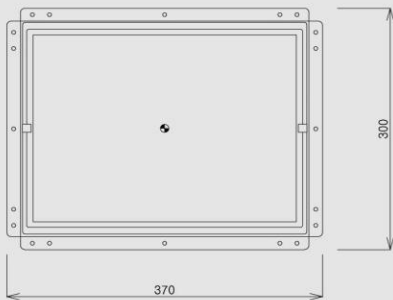

▲ FRONT VIEW



▲ REAR VIEW



▲ BOTTOM VIEW

RN Electronics Co., Ltd

Add 414, 172, LS-ro, Gunpo-si, Gyeonggi-do, 435-824, Korea

Tel +82-70-4370-4459 Fax +82-31-624-2130 Email info@vurex.net Website www.vurex.net

RNElectronics